

INTRODUCTION


In the near future, robotics are to become an essential asset in the development of an ageing industry, by offering autonomous and reproducible means of manufacturing and production control. In particular, metrology operations, aiming to ensure the mechanical compliance and manufacturing quality of produced parts, are perfect candidates for automation. We propose an original and versatile robotic setup, able to perform both geometric and acoustic characterizations of unknown structures. This solution essentially relies on the use of a robotic arm, fitted with appropriate sensors, such as a depth camera, a single-point vibrometer or a measurement microphone.

ROBOTIC ARM ABSOLUTE POSITIONING PRECISION

Absolute positioning precision assessment

In order to assess the absolute positioning precision of the robotic arm to be used, we opted for a multiple infrared cameras tracking tool - the *OptiTrack* - which provides the ability to measure the absolute position of spheric markers with a sub-millimetric accuracy.

As such an installation does not yield any information about the markers orientations, we conceived a rigid structure holding 7 markers, in a three dimensional and asymmetrical layout, in order to make up for this lack.

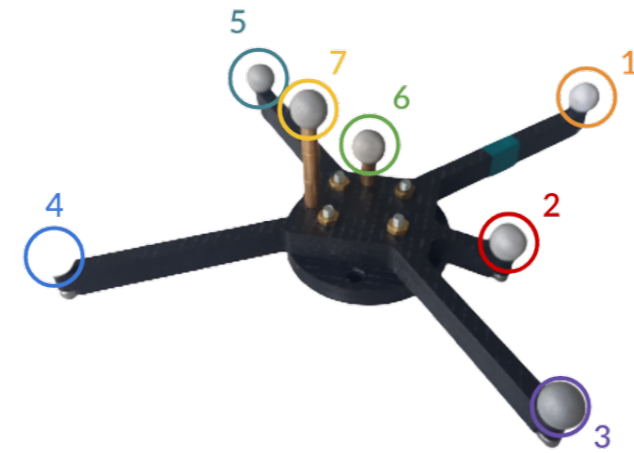

Using this so-called rigid body fixed on an UR10e robotic arm, two rounds of measurements were carried out using 100 randomly chosen learning configurations and 20 randomly picked testing configurations.

	Average absolute positioning error (m)	
	Learning error	Testing error
Without calibration	$1,02.10^{-1}$ m	$7,77.10^{-2}$ m
With calibration	$2,31.10^{-3}$ m	$2,04.10^{-3}$ m

Absolute positioning precision improvement

Given the poor absolute positioning precision of the robotic arm, and the significance of this aspect in order to obtain relevant metrology results, we designed the following hybridized calibration procedure :

- Geometric model definition** According to [1], build an *irreducible* and *complete* geometric model of the manipulator, which links the robotic arm configuration q to its end-effector position P , and highlights the sought geometric parameters vector :


$$P(q, \pi) \text{ with } \pi = (\pi_{Base}, \pi_{Robot}, \pi_{Tool})$$

- Measurements design and implementation** Perform a sufficiently high number of position measurements N , according to a predefined learning set of configurations maximizing the parameters *identifiability* [2].
- Geometric parameters optimization** Following the Gauss-Newton method depicted in [3], compute an estimation of π minimizing the euclidian distance between the computed and measured absolute positions.


Implementing this procedure, the absolute positioning accuracy of the robotic arm was improved almost ten-fold. Yet, further improvements could be achieved with an enhanced measurements design optimization.

Measurements design optimization

Define a task-oriented configurations sampling space

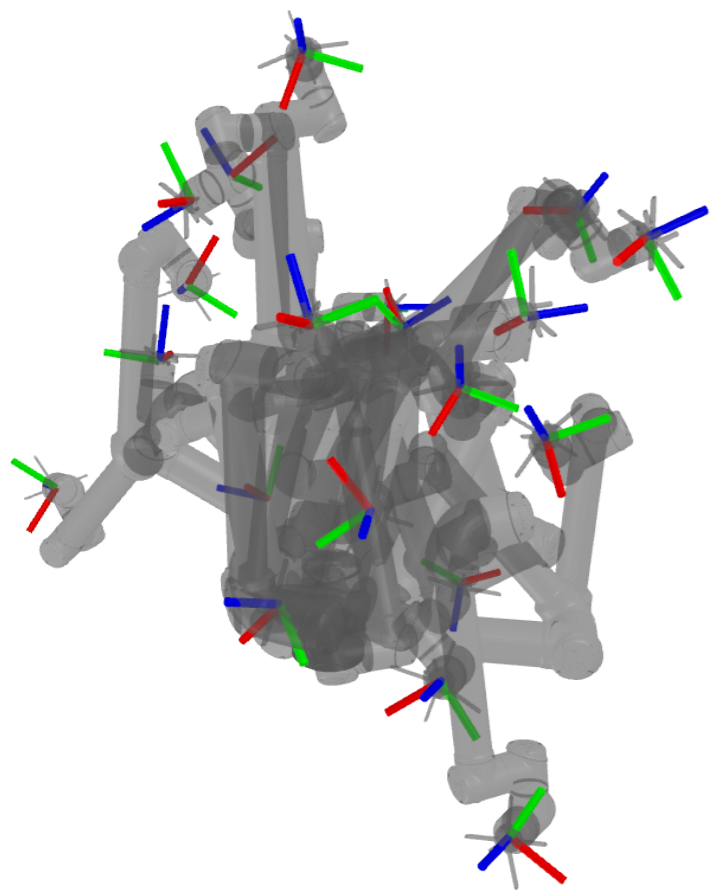

Random sampling

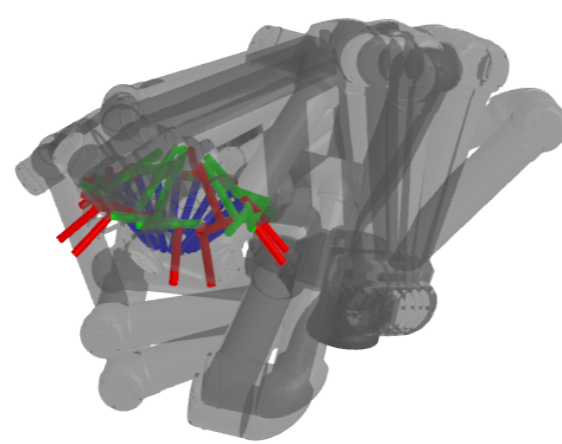

Task-oriented sampling : spheric scan

Focus more on precision, less on identifiability


Learning set definition	Identifiability metric	Precision increase
Simulated annealing	23,50	-2,25%
Random choice	23,22	97,4%
Greedy permutations	23,04	-2,41%
Genetic algorithm	22,76	-2,88%

⇒ A higher identifiability **does not** guarantee a higher precision !

$$\max_{\substack{Q= \\ q_1 \dots q_N}} \text{Tr} \left(\frac{\partial P^\top}{\partial \pi} \frac{\partial P}{\partial \pi} \right) \Big|_Q \quad \rightarrow \quad \max_{\substack{Q= \\ q_1 \dots q_N}} \text{Tr} \left(\frac{\partial P^*}{\partial \pi} \left(\frac{\partial P^\top}{\partial \pi} \frac{\partial P}{\partial \pi} \right)^{-1} \frac{\partial P^{*\top}}{\partial \pi} \right) \Big|_Q$$

Usual A-optimality metric [3] Precision-oriented metric [2]


GEOMETRIC CHARACTERIZATION

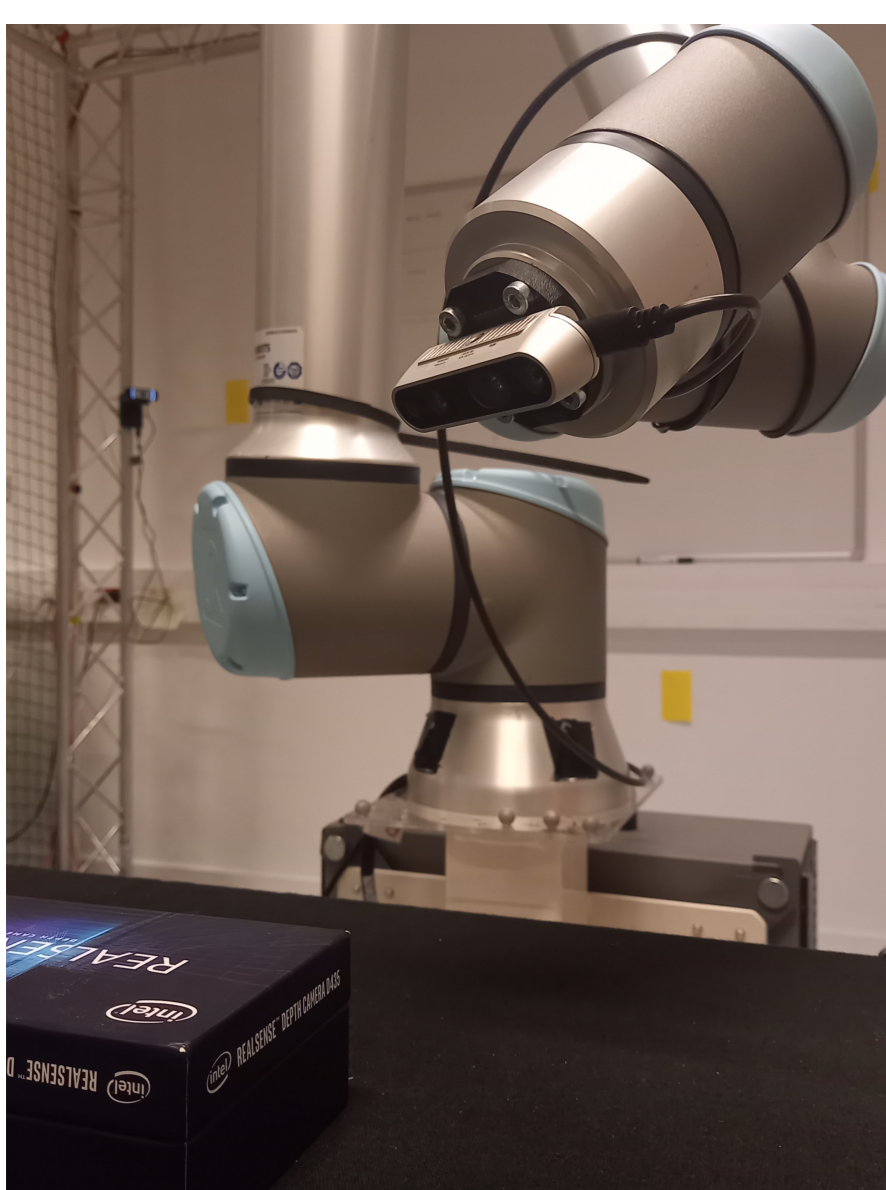

Depth camera setup




ICP matching


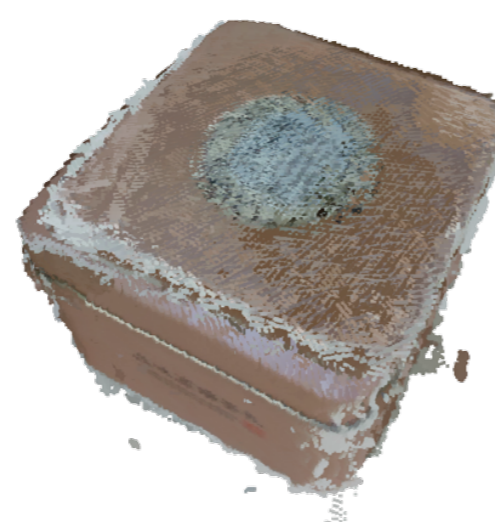


RTABMAP matching [5]

ACOUSTIC CHARACTERIZATION

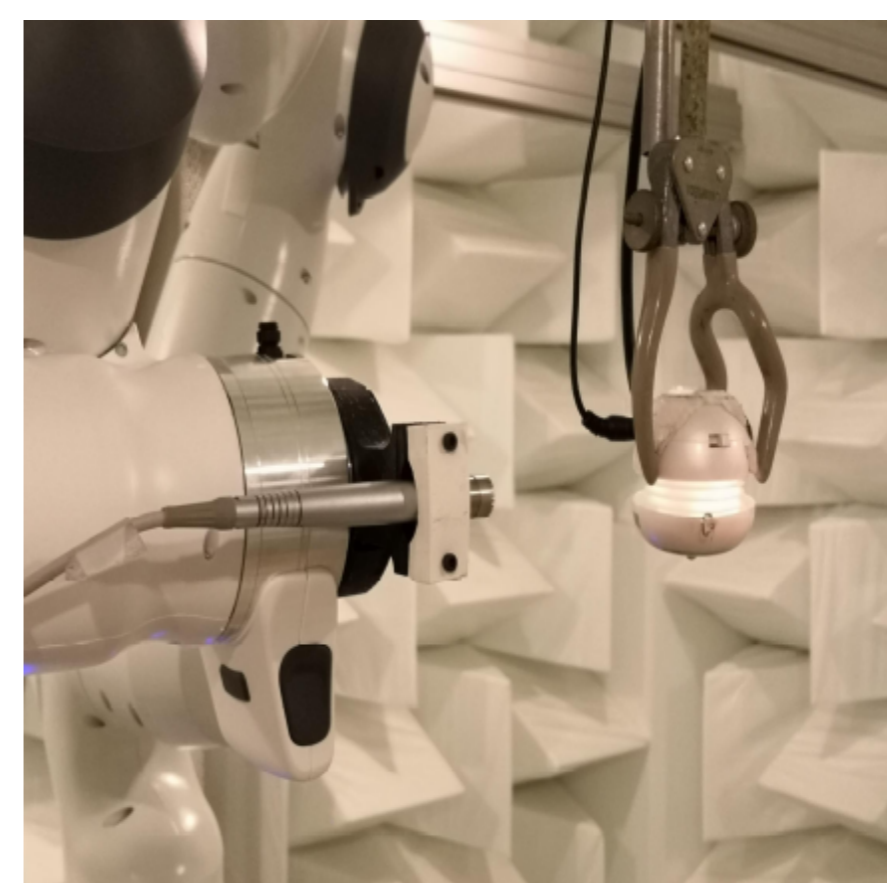

Microphone setup

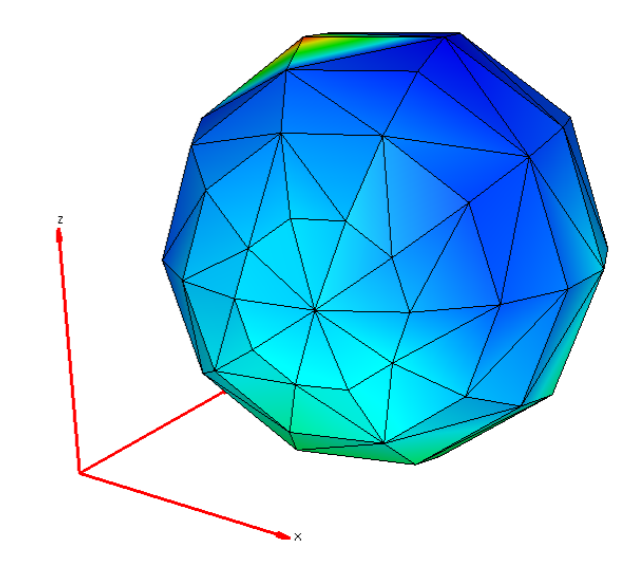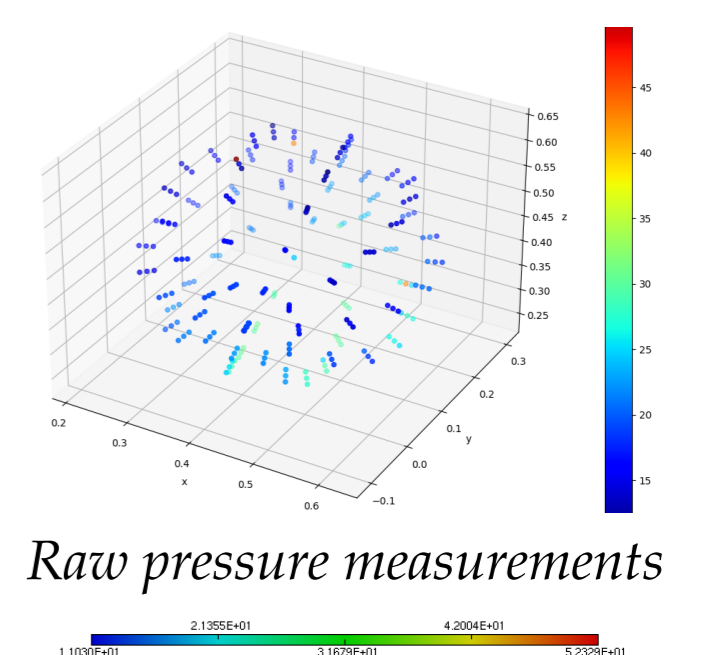

REFERENCES

- [1] A. Pashkevich, "Computer-aided generation of complete irreducible models for robotic manipulators", *3rd International Conference of Modeling and Simulation*, 2001.
- [2] A. Klimchik et al., "Advanced robot calibration using partial pose measurements", *18th International Conference on Methods and Models in Automation and Robotics*, 2013.
- [3] J. Alexandre dit Sandretto, "Certified calibration of parallel cable-driven robots", University of Nice Sophia Antipolis, France, 2013.
- [4] Z.-W. Luo et al., "Near-field acoustic holography with three-dimensional scanning measurements", *Journal of Sound and Vibration*, 2019.
- [5] M. Labbé et al., "RTAB-Map as an open-source lidar and visual simultaneous localization and mapping library for large-scale and long-term online operation", *Journal of Field Robotics*, 2019.

PERSPECTIVES

- **Implement and evaluate new measurements design and parameters optimization methods** within the robotic arm calibration process;
- **Improve and further automate both characterization processes** : post-processing, autonomous measurements definition and refinement, processes continuity, uncertainties integration, etc.